






Direct Drive





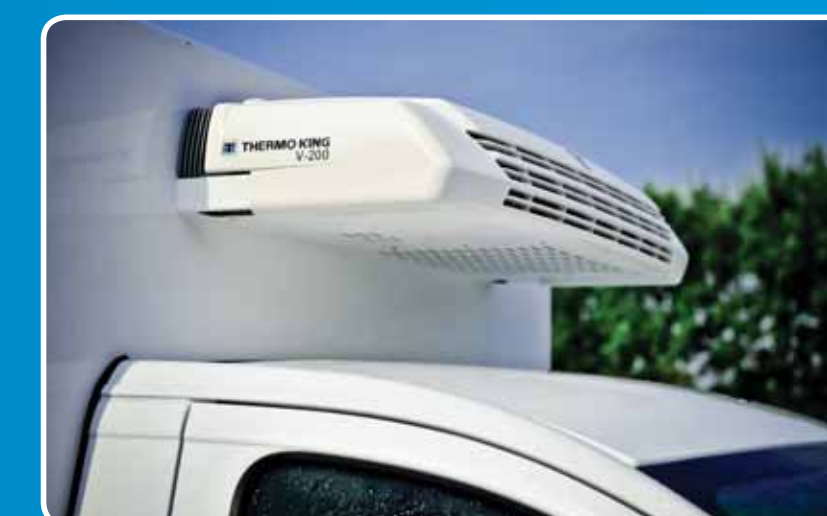

	30°C		 m ³ /h	m			
	Return Air= -20°C	Return Air= 0°C		-20°C	0°C		
Single Temperature							
V-700 MAX	3800	6950	2340	6	7,5	100	160
V-500 MAX (recip)	2735	5430	2110	5	6,5	60	132
V-500 MAX	2515	4925	2400	4,5	6	60	132
V-500 (recip)	1600	4025	2110	3	5,5	60	132
V-500	1500	3665	2400	3	5	60	132
V-400 MAX	2425	4215	1335	3	4	60	132
Multi Temperature							
V-700 MAX SPECTRUM (ES 400 + ES 400)	3707	7265	1290 x 2	up to 7	up to 7	100	160
V-700 MAX SPECTRUM (ES 500 + ES 150)	3305	6670	2200 + 790	up to 7	up to 7	100	160
V-700 MAX SPECTRUM (ES 500 + 2X ES 150)	3305	6670	2200 + (2 x 790)	up to 7	up to 7	100	160
V-500 MAX TCI (recip)	2790	4935	1150 + (2 x 750)	up to 3	up to 3	60	132
V-500 MAX TC (recip)	2790	4935	1150 + (2 x 750)	up to 3	up to 5	60	132
V-500 MAX TCI	2400	4570	1150 + (2 x 750)	up to 2.5	up to 2.5	60	132
V-500 MAX TC	2400	4570	1150 + (2 x 750)	up to 2.5	up to 5	60	132



Direct Drive



Single Temperature	30°C		 m ³ /h	m ³			
	Return Air=-20°C	Return Air=0°C		-20°C	0°C		
V-300 MAX	1820	3355	1250	17	28	25	75
V-300	1170	2800	1150	10	22	25	75
V-200 MAX	1560	2710	1070	12	21	25	75
V-200	1020	2250	1070	8	18	25	75
V-100 MAX	960	2055	695	7	15	25	43
V-100	575	1530	695	4	12	25	43
C-300	-	2800	1150	-	27	23	-
C-200	-	2250	1070	-	18	23	-
C-100	-	1530	695	-	10	23	-
B-100	390	1050	695	2,5	7	47	59
Multi Temperature							
V-300 MAX TCI	1615	2830	760 X 2	up to 8	up to 8	25	75
V-300 MAX TC	1615	2830	760 X 2	up to 8	up to 8	25	75
V-200 MAX TCI	1520	2825	695 X 2	up to 6	up to 6	25	75
V-200 MAX TC	1520	2825	695 X 2	up to 6	up to 6	25	75

